

|                         |                                                            |
|-------------------------|------------------------------------------------------------|
| <b>PRODUCT MATERIAL</b> | Die-cast aluminium                                         |
| <b>ADAPTER</b>          | 3-phase track adapter driver                               |
| <b>LIGHT SOURCE</b>     | Philips SLM G7                                             |
| <b>MODULE LIFETIME</b>  | Approx. 50.000 hours                                       |
| <b>DRIVER</b>           | Including Xitanium on/off driver                           |
| <b>COLORS (Δ)</b>       | ○ <b>3</b> = RAL 9003 white<br>● <b>5</b> = RAL 9005 black |
| <b>BEAM ANGLE</b>       | 24°                                                        |
| <b>ADJUSTABLE</b>       | Rotating 330°, 90° tiltable                                |
| <b>SIZE</b>             | Ø85 X 107mm                                                |



## OPTIONS


|                            |                                |                         |
|----------------------------|--------------------------------|-------------------------|
| <b>OPTIONAL BEAM ANGLE</b> | 15°                            | Art. no.: 3150.010.15.0 |
|                            | 36°                            | Art. no.: 3150.010.36.0 |
|                            | 45°                            | Art. no.: 3150.010.45.0 |
| <b>DIMMABLE</b>            | <b>DALI</b>                    | On request              |
| <b>WIRELESS DIMMABLE</b>   | Masterconnect, Easy Air/Zigbee |                         |

## INFORMATION

Nominal lifetime L90/B50 @50.000 h / 25°C



The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

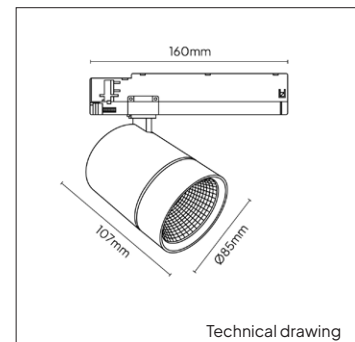

## AVAILABLE SLM OPTIONS

To order the correct product, please replace **COB\*** in the article number field with the COB code see last page of the catalogue

| ARTICLE NUMBER          | LUMINOUS FLUX | BRAND          | COLOR TEMPERATURE                          | SETTING         |
|-------------------------|---------------|----------------|--------------------------------------------|-----------------|
| Δ See colors            |               |                |                                            |                 |
| 3150. <b>COB*</b> .24.Δ | 1100lm        | Philips SLM G7 | 927 / 830 / 930 / 835 / 840 / 850          | High Efficiency |
| 3150. <b>COB*</b> .24.Δ | 1100lm        | Philips SLM G7 | Premium White 830 / 930 / 935 / 940        | High Efficiency |
| 3150. <b>COB*</b> .24.Δ | 1100lm        | Philips SLM G7 | Premium White HE 930                       | High Efficiency |
| 3150. <b>COB*</b> .24.Δ | 1100lm        | Philips SLM G7 | Premium Color 930                          | High Efficiency |
| 3150. <b>COB*</b> .24.Δ | 1100lm        | Philips SLM G7 | Food: Bakery / Iced Seafood / Live Seafood | High Efficiency |
| 3150. <b>COB*</b> .24.Δ | 2000lm        | Philips SLM G7 | 927 / 830 / 930 / 835 / 840 / 850          | High Efficiency |
| 3150. <b>COB*</b> .24.Δ | 2000lm        | Philips SLM G7 | Premium White 830 / 930 / 935 / 940        | High Efficiency |
| 3150. <b>COB*</b> .24.Δ | 2000lm        | Philips SLM G7 | Premium White HE 930                       | High Efficiency |
| 3150. <b>COB*</b> .24.Δ | 2000lm        | Philips SLM G7 | Premium Color 930                          | High Efficiency |
| 3150. <b>COB*</b> .24.Δ | 3000lm        | Philips SLM G7 | 827 / 830 / 835 / 840 / 850 / 857          | High Efficiency |
| 3150. <b>COB*</b> .24.Δ | 3000lm        | Philips SLM G7 | Premium White 830 / 930 / 935 / 940        | High Efficiency |
| 3150. <b>COB*</b> .24.Δ | 3000lm        | Philips SLM G7 | Premium White HE 930                       | High Efficiency |



High efficiency is the standard Keylight setting for all SLM G7 LED modules. For COB LED specification and warranty information regarding high efficiency, see last page of the catalogue. Standard system warranty is 5 years.