



PRODUCT MATERIAL	Die-cast aluminium
LIGHT SOURCE	Cree XHP-5 or DtW COB
MODULE LIFETIME	Approx. 50.000 hours
DRIVER	Excluding driver, SELECT OPTION
COLORS (Δ)	☐ 3 = RAL 9003 white ☒ 5 = RAL 9005 black
BEAM ANGLE	6°
BEAM ANGLE DTW	24°
ADJUSTABLE	No
SIZE	Ø88 X 97mm

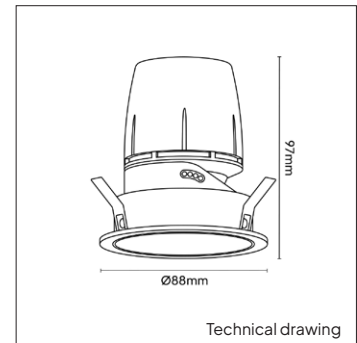

OPTIONS

OPTIONAL BEAM ANGLE	20°	Art. no.: 4301.011.20.0
	36°	Art. no.: 4301.101.36.0
	36°	Art. no.: 4301.202.36.0
ANTI-GLARE RING	Chrome	Included
	Copper	Art. no.: 4301.022.00.0
	Brass	Art. no.: 4301.033.00.0
	Black nickel	Art. no.: 4301.044.00.0
DRIVER OPTIONS	On/off	500mA 6-10W Art. no.: 0110.500.10.0
	Phase cut	500mA 6-10W Art. no.: 0110.500.20.7
	DALI	500mA 4-18W Art. no.: 0118.500.40.0 Max. 3 fixtures connected in serie per driver
DRIVER OPTIONS DTW	On/off	350mA 11-16W Art. no.: 0116.350.10.3
	Phase cut	350mA 6-13W Art. no.: 0113.350.20.1
	1/10V	350mA 0-15W Art. no.: 0115.350.30.0
	DALI	350mA 11-19W Art. no.: 0136.350.40.0
POWER CABLE OPTIONS Connected to driver/fixture	Europlug 2000mm 2 X 0,75 Art. no.: 0502.075.20.0	
	Wieland GST18/3 male 2000mm 3 X 0,75 Art. no.: 0501.183.20.0	
	Wieland T connector GST18/3 200mm 3 X 0,75 Art. no.: 0500.183.20.0	



ANTI-GLARE RING



Chrome



Black Nickel



Copper



Brass

INFORMATION

Always select a driver option and add the selected driver to your order.



Full warranty only applies when fixture is purchased in combination with recommended driver.



ARTICLE NUMBER Δ See colors	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	TC LIFETIME	mA
4302.111.06.Δ DTW	XHP-5	Cree	460lm	6W	56lm/W	2700K	>90	50.000 Hrs	500mA
4301.111.24.Δ	DtW COB	VS	740lm	13W	57lm/W	2000-2900K DTW	>90	50.000 Hrs	350mA

PRODUCT MATERIAL	Die-cast aluminium
LIGHT SOURCE	Cree XHP-5 or DtW COB
MODULE LIFETIME	Approx. 50.000 hours
DRIVER	Excluding driver, SELECT OPTION
COLORS (Δ)	○ 3 = RAL 9003 white ● 5 = RAL 9005 black
BEAM ANGLE	6°
BEAM ANGLE DTW	24°
ADJUSTABLE	No
SIZE	Ø79 X 97mm



OPTIONS

OPTIONAL BEAM ANGLE	20°	Art. no.: 4301.011.20.0
	36°	Art. no.: 4301.101.36.0
OPTIONAL BEAM ANGLE DTW	36°	Art. no.: 4301.202.36.0
ANTI-GLARE RING	Chrome	Included
	Copper	Art. no.: 4301.022.00.0
	Brass	Art. no.: 4301.033.00.0
	Black nickel	Art. no.: 4301.044.00.0
DRIVER OPTIONS	On/off	500mA 6-10W Art. no.: 0110.500.10.0
	Phase cut	500mA 6-10W Art. no.: 0110.500.20.7
	DALI	500mA 4-18W Art. no.: 0118.500.40.0 Max. 3 fixtures connected in serie per driver
DRIVER OPTIONS DTW	On/off	350mA 11-16W Art. no.: 0116.350.10.3
	Phase cut	350mA 6-13W Art. no.: 0113.350.20.1
	1/10V	350mA 0-15W Art. no.: 0115.350.30.0
	DALI	350mA 11-19W Art. no.: 0136.350.40.0
POWER CABLE OPTIONS Connected to driver/fixture	Europlug 2000mm 2 X 0,75 Art. no.: 0502.075.20.0	
	Wieland GST18/3 male 2000mm 3 X 0,75 Art. no.: 0501.183.20.0	
	Wieland T connector GST18/3 200mm 3 X 0,75 Art. no.: 0500.183.20.0	

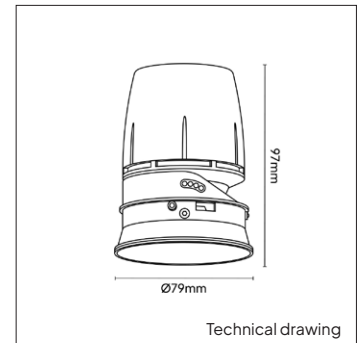

ANTI-GLARE RING



Chrome




Black Nickel



Copper



Brass

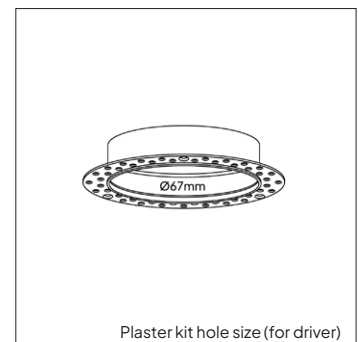

Plaster kit hole size (for driver)

INFORMATION

Always select a driver option and add the selected driver to your order.



Pay attention at the inner size (Ø67mm) of the plaster kit, as the chosen driver needs to fit through this hole.



Full warranty only applies when fixture is purchased in combination with recommended driver.

ARTICLE NUMBER Δ See colors	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	TC LIFETIME	mA
4302.211.06.Δ DTW	XHP-5	Cree	460lm	6W	56lm/W	2700K	>90	50.000 Hrs	500mA
4301.211.24.Δ	DtW COB	VS	740lm	13W	57lm/W	2000-2900K DTW	>90	50.000 Hrs	350mA