






PRODUCT MATERIAL	Die-cast aluminium
LIGHT SOURCE	Citizen CLU701
MODULE LIFETIME	Approx. 35.000 hours
DRIVER	Excluding driver, SELECT OPTION
COLORS (Δ)	○ 3 = RAL 9003 white ● 5 = RAL 9005 black
BEAM ANGLE	 30°
ADJUSTABLE	No
SIZE	Ø57 X 95mm



OPTIONS


OPTIONAL BEAM ANGLE	 38° Art. no.: 4941.010.38.0
DRIVER OPTIONS 250MA	On/off 250mA 7-13W Art. no.: 0115.250.10.0 Size: 100 x 43 x 22,5mm
	Phase cut 250mA 7-10W Art. no.: 0110.250.20.4 Size: 100 x 50 x 19mm
	1/10V 260mA 1-14W Art. no.: 0114.250.30.0 Size: 111 x 52 x 22mm This driver can only be placed externally
	DALI 250mA 6-13W Art. no.: 0114.250.40.1 Size: 97,2 x 43 x 30mm
DRIVER OPTIONS DTW	On/off 500mA 6-10W Art. no.: 0110.500.10.0 Size: 100 x 43 x 22,5mm
	Phase cut 500mA 6-10W Art. no.: 0110.500.20.7 Size: 85 x 40,4 x 22mm
	DALI 500mA 4-18W Art. no.: 0118.500.40.0 Size: 95 x 53 x 30mm This driver can only be placed externally
POWER CABLE OPTIONS Connected to driver/fixture	Europlug 2000mm 2 X 0,75 Art. no.: 0502.075.20.0
	Wieland GST18/3 male 2000mm 3 X 0,75 Art. no.: 0501.183.20.0
	Wieland T connector GST18/3 200mm 3 X 0,75 Art. no.: 0500.183.20.0

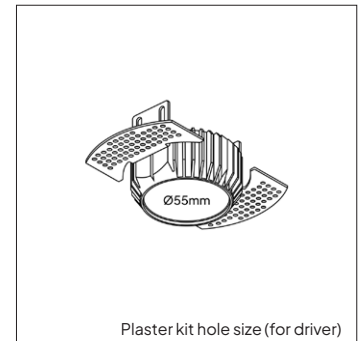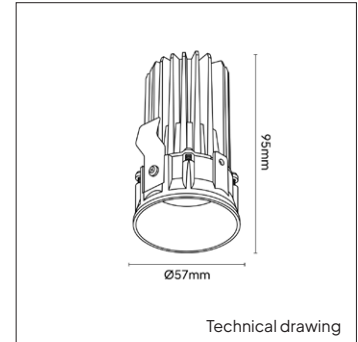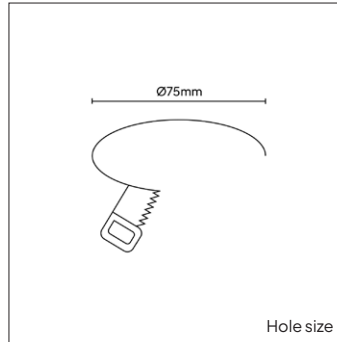



INFORMATION

Including plaster kit

Always select a driver option and add the selected driver to your order.

 Pay attention at the inner size (Ø55mm) of the plaster kit, as the chosen driver needs to fit through this hole.

 Full warranty only applies when fixture is purchased in combination with recommended driver.

ARTICLE NUMBER	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	TC LIFETIME	mA
4982.250.30.Δ	CLU701	Citizen	770lm	7,5W	102lm/W	2700K	>90	35.000 Hrs	250mA
4982.300.30.Δ	CLU701	Citizen	828lm	7,5W	110lm/W	3000K	>90	35.000 Hrs	250mA
4982.999.30.Δ	Opto	Prolight	919lm	9,4W	98lm/W	2000K-3000K 	>90	35.000 Hrs	500mA

Δ See colors