



PRODUCT MATERIAL	Aluminium profile
LIGHT SOURCE	Philips Ledline
MODULE LIFETIME	Approx. 50.000 hours
DRIVER LEDLINE	Including on/off driver
COLORS (Δ)	<ul style="list-style-type: none"> ○ 3 = RAL 9003 white ● 5 = RAL 9005 black ● 6 = RAL 9006 alu
REFLECTOR	Aluminium white
SIZE	See technical drawing

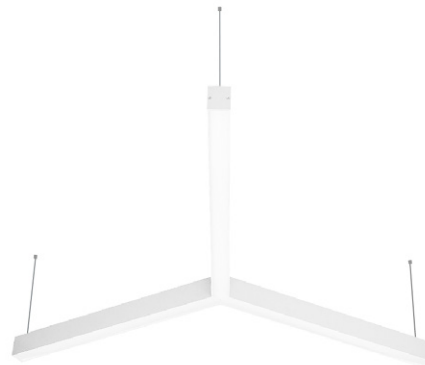

OPTIONS

COLORS	Available in all RAL colours on request Additional price + 10%
DIMMABLE	DALI On request
SUSPENSION SET	1500mm Included
DIFFUSER	White opalic diffuser (OP) or Microprismatic UGR<19 (MP19) option
EMERGENCY	3 hours
IP CLASS	IP20 in standard, IP44 on request
CRI	>80 in standard, other on request
MOVEMENT SENSOR	On request
DAYLIGHT SENSOR	On request
TUNABLE WHITE	On request
CYAN ENHANCED STATIC	On request
WIRELESS DIMMABLE	Masterconnect, Easy Air/Zigbee

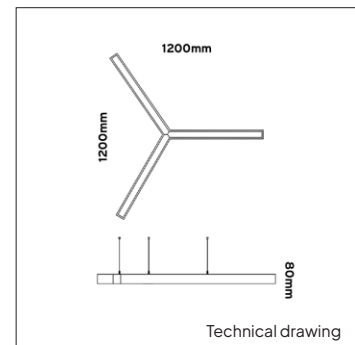

INFORMATION

Nominal lifetime L80/B10 @70.000 h / 25°C

- ⚠ Bespoke size & product features available
- ⚠ The light source in this product can be replaced with an equivalent module made by Philips, Osram or Tridonic.

DIFFUSER



White opalic



Microprismatic UGR<19

ARTICLE NUMBER	LENGTH	GROSS LUMEN OUTPUT	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI
OPAL						
Δ See colors						
55.00440.83.E.OP.Δ	1200mm	6600lm	39W	169lm/W	3000K	>80
55.00440.81.E.OP.Δ	1200mm	6600lm	39W	169lm/W	3500K	>80
55.00440.84.E.OP.Δ	1200mm	6600lm	39W	169lm/W	4000K	>80
55.00441.83.E.OP.Δ	1800mm	9900lm	58W	171lm/W	3000K	>80
55.00441.81.E.OP.Δ	1800mm	9900lm	58W	171lm/W	3500K	>80
55.00441.84.E.OP.Δ	1800mm	9900lm	58W	171lm/W	4000K	>80
55.00442.83.E.OP.Δ	2400mm	13200lm	78W	169lm/W	3000K	>80
55.00442.81.E.OP.Δ	2400mm	13200lm	78W	169lm/W	3500K	>80
55.00442.84.E.OP.Δ	2400mm	13200lm	78W	169lm/W	4000K	>80
UGR<19						
55.00440.83.E.MP19.Δ	1200mm	6600lm	39W	169lm/W	3000K	>80
55.00440.81.E.MP19.Δ	1200mm	6600lm	39W	169lm/W	3500K	>80
55.00440.84.E.MP19.Δ	1200mm	6600lm	39W	169lm/W	4000K	>80
55.00441.83.E.MP19.Δ	1800mm	9900lm	58W	171lm/W	3000K	>80
55.00441.81.E.MP19.Δ	1800mm	9900lm	58W	171lm/W	3500K	>80
55.00441.84.E.MP19.Δ	1800mm	9900lm	58W	171lm/W	4000K	>80
55.00442.83.E.MP19.Δ	2400mm	13200lm	78W	169lm/W	3000K	>80
55.00442.81.E.MP19.Δ	2400mm	13200lm	78W	169lm/W	3500K	>80
55.00442.84.E.MP19.Δ	2400mm	13200lm	78W	169lm/W	4000K	>80