

# 48V MAGNET XS TRACK




**KEYLIGHT**



# TRACKS & ACCESSORIES




ARTICLE NUMBER	DESCRIPTION	COLOR
5700.200.99.5	Magnet XS Track Low 2000mm	Black
5700.300.99.5	Magnet XS Track Low 3000mm	Black
5700.900.00.5	Magnet XS cover 3000mm	Black
5700.990.99.5	Magnet XS Corner Horizontal Low + Power Connector	Black
5700.991.99.5	Magnet XS Corner Vertical Low + Power Connector	Black
5700.994.99.5	Magnet XS End Cap Low (2pcs)	Black
5700.992.99.5	Magnet XS Power Feed 3000mm Cable 4 wires	Black
5700.993.99.5	Magnet XS Straight Connector Low + Bracket	Black
5700.999.99.5	Magnet XS Pendant Kit Low 3000mm Wire	Black






ARTICLE NUMBER	DESCRIPTION	COLOR
5701.200.99.5	Magnet XS Track High 2000mm	Black
5701.300.99.5	Magnet XS Track High 3000mm	Black
5700.900.00.5	Magnet XS cover 3000mm	Black
5701.990.99.5	Magnet XS Corner Horizontal High + Power Connector	Black
5701.991.99.5	Magnet XS Corner Vertical High + Power Connector	Black
5701.994.99.5	Magnet XS End Cap High/Recessed (2pcs)	Black
5700.992.99.5	Magnet XS Power Feed 3000mm Cable 4 wires	Black
5701.993.99.5	Magnet XS Straight Connector High/Recessed + Bracket	Black
5701.999.99.5	Magnet XS Pendant Kit High 3000mm Wire	Black





ARTICLE NUMBER	DESCRIPTION	COLOR
5702.200.99.5	Magnet XS Track Recessed 2000mm	Black
5702.300.99.5	Magnet XS Track Recessed 3000mm	Black
5700.900.00.5	Magnet XS cover 3000mm	Black
5702.990.99.5	Magnet XS Corner Horizontal Recessed + Power Connector	Black
5702.991.99.5	Magnet XS Corner Vertical Recessed + Power Connector	Black
5701.994.99.5	Magnet XS End Cap High/Recessed (2pcs)	Black
5700.992.99.5	Magnet XS Power Feed 3000mm Cable 4 wires	Black
5701.993.99.5	Magnet XS Straight Connector High/Recessed + Bracket	Black





## DRIVERS ON/OFF

ARTICLE NUMBER	VOLTAGE	WATTAGE	IP
0148.060.10.0	48VDC	60W	IP67
0148.100.10.1	48VDC	100W	IP67
0148.150.10.1	48VDC	150W	IP67
0148.240.10.0	48VDC	240W	IP67
0148.320.10.0	48VDC	320W	IP67



Full warranty only applies when fixtures are purchased in combination with recommended driver.



# TRACK LIGHTING

<b>PRODUCT MATERIAL</b>	Die-cast aluminium
<b>ADAPTER</b>	48V adapter
<b>LIGHT SOURCE</b>	Tiandian 3535
<b>MODULE LIFETIME</b>	Approx. 35.000 hours
<b>DRIVER</b>	Including DALI driver
<b>COLORS</b>	● 5 = RAL 9005 black
<b>BEAM ANGLE</b>	Adjustable 15°-36°
<b>ADJUSTABLE</b>	No
<b>SIZE</b>	Ø20 X 36mm




**OPTIONS**

<b>WIRELESS DIMMABLE</b>	Zigbee or Casambi
--------------------------	-------------------

**INFORMATION**

This fixture is equipped with a **focusable lens**. The beam angle can be adjusted from 15-36 degrees

 Magnet XS Gallery Nano is only for low track, not suitable for high track or recessed track

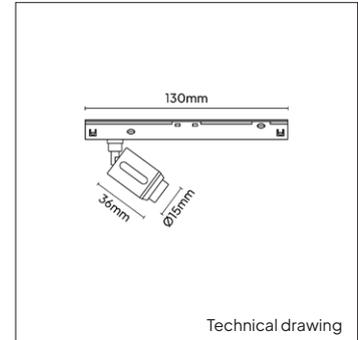

Technical drawing

**FOCUSABLE LENS**



ARTICLE NUMBER	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	TC LIFETIME	mA
5750.270.36.5	3535	Tiandian	370lm	3W	123lm/W	2700K	>90	35.000 Hrs	250mA
5750.300.36.5	3535	Tiandian	370lm	3W	123lm/W	3000K	>90	35.000 Hrs	250mA

# KEYLIGHT


# MAGNET XS TUBE MINI

<b>PRODUCT MATERIAL</b>	Die-cast aluminium
<b>ADAPTER</b>	48V adapter
<b>LIGHT SOURCE</b>	Bridgelux V4HD
<b>MODULE LIFETIME</b>	Approx. 50.000 hours
<b>DRIVER</b>	Including DALI driver
<b>COLORS</b>	● 5 = RAL 9005 black
<b>BEAM ANGLE</b>	Optional beam angle, SELECT OPTION
<b>ADJUSTABLE</b>	Yes
<b>SIZE</b>	Ø35 X 70mm



## OPTIONS

<b>OPTIONAL BEAM ANGLE</b>	 15°	Art. no.: 5770.000.15.0
	 24°	Art. no.: 5770.000.24.0
	 36°	Art. no.: 5770.000.36.0
	 50°	Art. no.: 5770.000.50.0
<b>HONEYCOMB</b>	Art. no.: 5770.040.00.0	
<b>WIRELESS DIMMABLE</b>	Zigbee or Casambi	

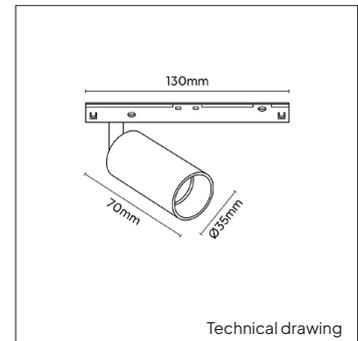

## HONEYCOMB




Honeycomb

ARTICLE NUMBER	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	TC LIFETIME	mA
5770.270.00.5	V4HD	Bridgelux	481lm	6W	80lm/W	2700K	>90	50.000 Hrs	150mA
5770.300.00.5	V4HD	Bridgelux	523lm	6W	87lm/W	3000K	>90	50.000 Hrs	150mA

# KEYLIGHT

# MAGNET XS PASO NANO

<b>PRODUCT MATERIAL</b>	Die-cast aluminium
<b>ADAPTER</b>	48V adapter
<b>LIGHT SOURCE</b>	SMD3535
<b>MODULE LIFETIME</b>	Approx. 50.000 hours
<b>DRIVER</b>	Including DALI driver
<b>COLORS</b>	● 5 = RAL 9005 black
<b>BEAM ANGLE</b>	▲ 24°
<b>ADJUSTABLE</b>	Yes
<b>SIZE</b>	Ø24 X103mm
<b>OPTIONS</b>	
<b>WIRELESS DIMMABLE</b>	Zigbee or Casambi

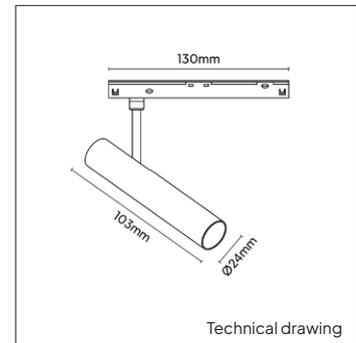

ARTICLE NUMBER	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	TC LIFETIME	mA
5740.270.24.5	SMD3535	LEDD	350lm	6W	58lm/W	2700K	>90	50.000 Hrs	400mA
5740.300.24.5	SMD3535	LEDD	370lm	6W	62lm/W	3000K	>90	50.000 Hrs	400mA

# KEYLIGHT

# MAGNET XS SPOTTI MINI

<b>PRODUCT MATERIAL</b>	Die-cast aluminium
<b>ADAPTER</b>	48V adapter
<b>LIGHT SOURCE</b>	Bridgelux V6HD
<b>MODULE LIFETIME</b>	Approx. 50.000 hours
<b>DRIVER</b>	Including DALI driver
<b>COLORS</b>	● 5 = RAL 9005 black
<b>BEAM ANGLE</b>	Optional beam angle, SELECT OPTION
<b>ADJUSTABLE</b>	No
<b>SIZE</b>	Ø46 X102mm





## OPTIONS

<b>OPTIONAL BEAM ANGLE</b>	 15°	Art. no.: 5780.000.15.0
	 24°	Art. no.: 5780.000.24.0
	 36°	Art. no.: 5780.000.36.0
	 50°	Art. no.: 5780.000.50.0
<b>HONEYCOMB</b>	Art. no.: 5780.040.00.0	
<b>WIRELESS DIMMABLE</b>	Zigbee or Casambi	

## INFORMATION

 Not suitable for recessed track.

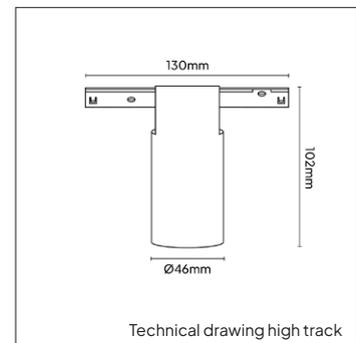



## HONEYCOMB



Honeycomb


ARTICLE NUMBER	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	TC LIFETIME	mA
<b>LOW</b>									
5780.270.00.5	V6HD	Bridgelux	739lm	10W	74lm/W	2700K	>90	50.000 Hrs	250mA
5780.300.00.5	V6HD	Bridgelux	803lm	10W	80lm/W	3000K	>90	50.000 Hrs	250mA
<b>HIGH</b>									
5781.270.00.5	V6HD	Bridgelux	739lm	10W	74lm/W	2700K	>90	50.000 Hrs	250mA
5781.300.00.5	V6HD	Bridgelux	803lm	10W	80lm/W	3000K	>90	50.000 Hrs	250mA

<b>PRODUCT MATERIAL</b>	Die-cast aluminium
<b>ADAPTER</b>	48V adapter
<b>LIGHT SOURCE</b>	Bridgelux 3030
<b>MODULE LIFETIME</b>	Approx. 50.000 hours
<b>DRIVER</b>	Including DALI driver
<b>COLORS</b>	● 5 = RAL 9005 black
<b>BEAM ANGLE</b>	▲ 36°
<b>ADJUSTABLE</b>	No
<b>SIZE</b>	195/291 X 10 X 30mm
<b>OPTIONS</b>	
<b>WIRELESS DIMMABLE</b>	Zigbee or Casambi

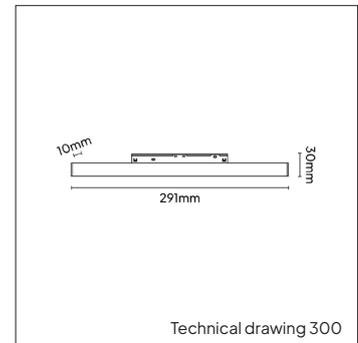

ARTICLE NUMBER	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	TC LIFETIME	mA
<b>SKY 200</b>									
5760.270.30.5	3030	Bridgelux	512lm	10W	51lm/W	2700K	>90	50.000 Hrs	250mA
5760.300.30.5	3030	Bridgelux	557lm	10W	56lm/W	3000K	>90	50.000 Hrs	250mA
<b>SKY 300</b>									
5761.270.30.5	3030	Bridgelux	788lm	15W	53lm/W	2700K	>90	50.000 Hrs	350mA
5761.300.30.5	3030	Bridgelux	856lm	15W	57lm/W	3000K	>90	50.000 Hrs	350mA

<b>PRODUCT MATERIAL</b>	Die-cast aluminium
<b>ADAPTER</b>	48V adapter
<b>LIGHT SOURCE</b>	Bridgelux 3030
<b>MODULE LIFETIME</b>	Approx. 50.000 hours
<b>DRIVER</b>	Including DALI driver
<b>COLORS</b>	● 5 = RAL 9005 black
<b>BEAM ANGLE</b>	▲ 36°
<b>ADJUSTABLE</b>	Yes
<b>SIZE</b>	195 X 10 X 60mm
<b>OPTIONS</b>	
<b>WIRELESS DIMMABLE</b>	Zigbee or Casambi

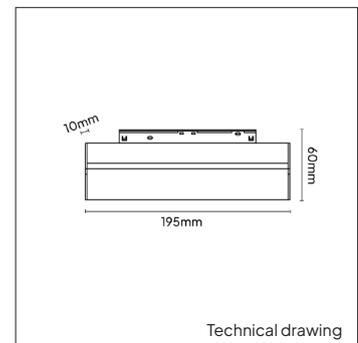

ARTICLE NUMBER	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	TC LIFETIME	mA
5762.270.30.5	3030	Bridgelux	512lm	10W	51lm/W	2700K	>90	50.000 Hrs	250mA
5762.300.30.5	3030	Bridgelux	557lm	10W	56lm/W	3000K	>90	50.000 Hrs	250mA

<b>PRODUCT MATERIAL</b>	Die-cast aluminium
<b>ADAPTER</b>	48V adapter
<b>LIGHT SOURCE</b>	Bridgelux V4HD
<b>MODULE LIFETIME</b>	Approx. 50.000 hours
<b>DRIVER</b>	Including DALI driver
<b>COLORS</b>	● 5 = RAL 9005 black
<b>BEAM ANGLE</b>	nvt
<b>ADJUSTABLE</b>	No
<b>SIZE</b>	Ø100mm



**OPTIONS**

<b>WIRELESS DIMMABLE</b>	Zigbee or Casambi
--------------------------	-------------------

**INFORMATION**

**The Unique Beauty of Alabaster in Lighting Design**

The natural translucency of alabaster allows for a soft, diffuse distribution of light, creating a warm and inviting atmosphere. Each piece of natural alabaster stone is uniquely veined, ensuring that no two examples are ever the same.

**What Colors Does Alabaster Come In?**


Alabaster can range from white and yellow to brown, with some varieties leaning towards pink or gray tones.

**Characteristics of Gypsum Alabaster (or Selenite)**

Gypsum alabaster is a translucent type of stone composed of partially crystallized gypsum. It is typically found in nodular forms in regions such as Italy, Spain, and Egypt. The outer surface of alabaster nodules often features irregularities, with clay residues and earthy inclusions embedded within the stone. These natural impurities are a hallmark of alabaster, contributing to its distinctive charm.

**Not to Be Confused with Marble**

Alabaster is a semi-crystalline form of gypsum, differing from marble, which is a type of limestone it often resembles. Unlike many other stones extracted from quarries, alabaster is discovered in nodules beneath the ground. Depending on its origin, alabaster can display a wide variety of colors, adding to its versatility and appeal in design. This unique combination of translucency, texture, and color makes alabaster a timeless choice for creating elegant and atmospheric lighting solutions.

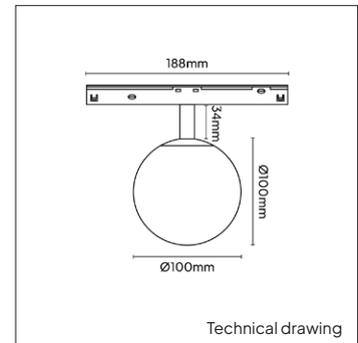

ARTICLE NUMBER	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	TC LIFETIME	mA
5730.272.06.5	V4HD	Bridgelux	239lm	6W	40lm/W	2700K	>90	50.000 Hrs	150mA
5730.302.06.5	V4HD	Bridgelux	260lm	6W	43lm/W	3000K	>90	50.000 Hrs	150mA

# KEYLIGHT

# MAGNET XS GLOW P ALABASTER

<b>PRODUCT MATERIAL</b>	Die-cast aluminium + Alabaster
<b>ADAPTER</b>	48V track adapter
<b>LIGHT SOURCE</b>	Bridgelux V6HD
<b>MODULE LIFETIME</b>	Approx. 50.000 hours
<b>DRIVER</b>	Including DALI driver
<b>COLORS</b>	● 5 = RAL 9005 black
<b>ADJUSTABLE</b>	No
<b>SIZE</b>	Ø100mm
<b>OPTIONS</b>	
<b>WIRELESS DIMMABLE</b>	Zigbee or Casambi



## INFORMATION

This fixture is supplied as standard with 3 meters of cable. Should you require a shorter length, please indicate your preference, and we will customize the cable to your desired length. It is not possible to shorten the cable yourself.

### The Unique Beauty of Alabaster in Lighting Design

The natural translucency of alabaster allows for a soft, diffuse distribution of light, creating a warm and inviting atmosphere. Each piece of natural alabaster stone is uniquely veined, ensuring that no two examples are ever the same.

### What Colors Does Alabaster Come In?


Alabaster can range from white and yellow to brown, with some varieties leaning towards pink or gray tones.

### Characteristics of Gypsum Alabaster (or Selenite)

Gypsum alabaster is a translucent type of stone composed of partially crystallized gypsum. It is typically found in nodular forms in regions such as Italy, Spain, and Egypt. The outer surface of alabaster nodules often features irregularities, with clay residues and earthy inclusions embedded within the stone. These natural impurities are a hallmark of alabaster, contributing to its distinctive charm.

### Not to Be Confused with Marble

Alabaster is a semi-crystalline form of gypsum, differing from marble, which is a type of limestone it often resembles. Unlike many other stones extracted from quarries, alabaster is discovered in nodules beneath the ground. Depending on its origin, alabaster can display a wide variety of colors, adding to its versatility and appeal in design. This unique combination of translucency, texture, and color makes alabaster a timeless choice for creating elegant and atmospheric lighting solutions.

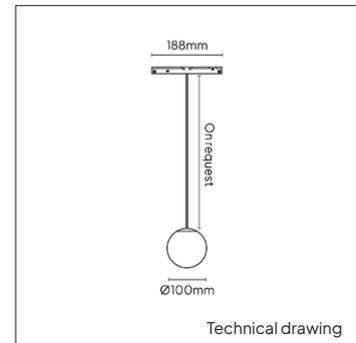

ARTICLE NUMBER	LAMP TYPE	BRAND	LUMINOUS FLUX	OUTPUT POWER	MODULE EFFICIENCY	COLOR TEMPERATURE	CRI	TC LIFETIME	mA
5730.274.06.5	V6HD	Bridgelux	239lm	6W	40lm/W	2700K	>90	50.000 Hrs	150mA
5730.304.06.5	V6HD	Bridgelux	260lm	6W	43lm/W	3000K	>90	50.000 Hrs	150mA